Installation:

1st nut should be spanned with 40 - 45Nm.

2nd nut should shall be brought at least to a snug-tight condition, with special care being given to avoid over-tightening. Nut-marking should be made acc. to figure after torque.


Maintenance:


Visual inspection of bolt torque and any loose items is made 1 year after installation, and afterwards every 5th year.

Check if the marking from bolt torque is still straight.

Check if the corrosion protection system is satisfactory.

Any findings must be repaired as soon as possible.

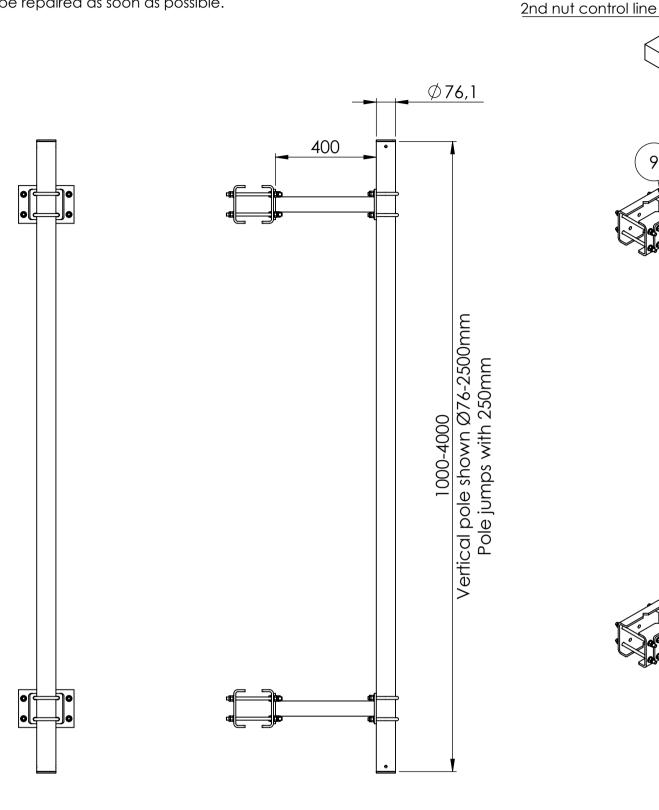

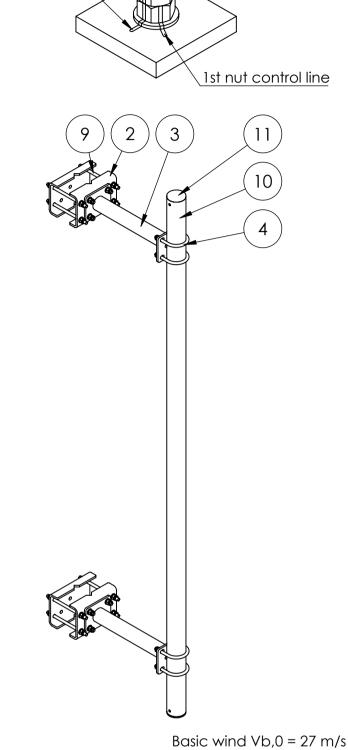

Terrain class TC = 1

Max height of installation = 70m

Max loads per 1 mount pole from equipment: 150kg, CxA=1.6m2

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
2	CB-L60-110 300	C bracket L60-110	4
3	CVB_H400	Horizontal pole for C and V bracket - Vertical Ø60,3-76,1	2
4	U-bolt M12 C-C = 90		4
5	Washer ISO 7089 - 12		40
6	ISO 4017 - M12 x 45-N		8
7	ISO - 4032 - M12 - W - N		32
8	ISO - 4035 - M12 - N		32
9	M12x220 DIN976	Horizontal pole bracket pin-bolts	8
10	Pole Ø76-2500	Vertical pole Ø76,1 - length: 2500	1
11	GL 76x1.6-4	tubular legs for Ø76,1	2

Rev.:	Int.:	Date:		Comment									
		Customer.:											
		Subjekt.:	Ante	nna offset	f.	L60-	110	with	fixed				
X		Date.:	24-06-	2020	Pro	duction no	D.:			Scale.:	: 1:15		Format:A3
0	A/ST	Order no.:			Ca	lculation:				Int.:	SP/MRF		Projektion:
Ca	Drawing. No.: CB-L60-110 H400 Note.:								Tolerance: DS/EN 1090-2				
This drawing is our property and must not be copied, transfered or in any way used by a third party without our written permission DS/ISO 2768-2-L													
Carl C	A/S M	anufacturing	Enginee	ring Commerc	Smed	devej 2	DK-690) Skjern	Tel. +4	45 97351	1066 Fax +45 97	35127	6 www.carl-c.com