Installation:

1st nut should be spanned to a tight condition.

2nd nut should shall be brought at least to a snug-tight condition, with special care being given to avoid over-tightening. Nut-marking should be made acc. to figure after torque.


Maintenance:


Visual inspection of bolt torque and any loose items is made 1 year after installation, and afterwards every 5th year.


Check if the marking from bolt torque is still straight.

Check if the corrosion protection system is satisfactory.

Any findings must be repaired as soon as possible.

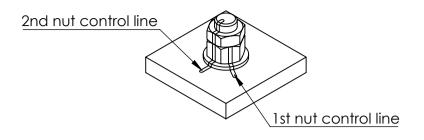

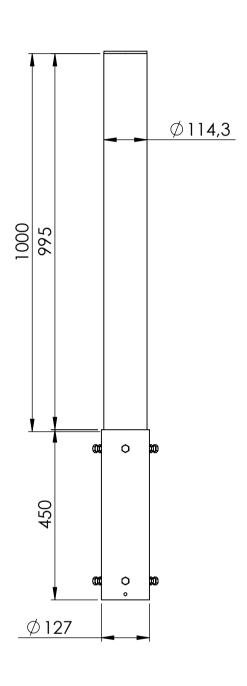

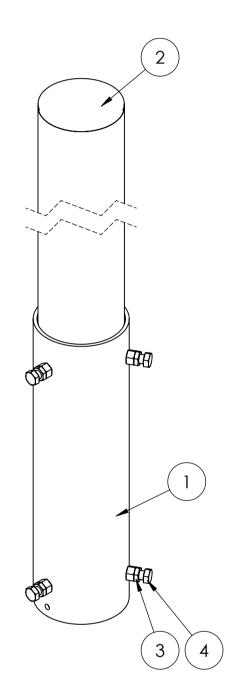



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	ET-Ø114_V1000	Extension tube f. Ø114 - V1000	1
2	GL114x3.2-5,5	tubular legs for Ø114,3	1
3	ISO - 4035 - M12 - N		6
4	ISO 4017 - M12 x 30-N		6

Rev.:	Int.:	Date:		Comment						
	X	Customer.:								
	4	Subjekt: Extension tube f. Ø114 - V1000								
		Date.: 1	9-10-	2021	Production no.:		Scale.:	1:10	Format:A3	
0	A/ST	Order no.:			Calculation:		Int.:	SP/MRF	Projektion:	
Ca	rie	Drawing. No.: E	Drawing. No.: ET-Ø114 V1000					·	Tolerance: DS/EN 1090-2	
This drawing is our property and must not be copied, transfered or in any way used by a third party without our written permission DS/ISO 2768-2-L										
Carl C	A/S M	anufacturing E	ngine	ering Commerc	Smedevej 2 DK-6	900 Skjern Tel	+45 97351	066 Fax +45 97351:	276 www.carl-c.com	