Installation:

1st nut should be spanned to a tight condition.

2nd nut should shall be brought at least to a snug-tight condition, with special care being given to avoid over-tightening. Nut-marking should be made acc. to figure after torque.


Maintenance:


Visual inspection of bolt torque and any loose items is made 1 year after installation, and afterwards every 5th year.


Check if the marking from bolt torque is still straight.

Check if the corrosion protection system is satisfactory.

Any findings must be repaired as soon as possible.

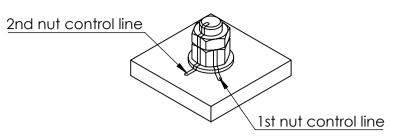

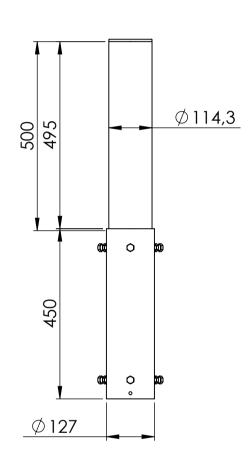

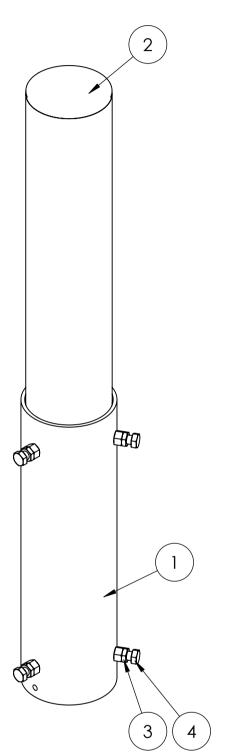



ITEM NO.	PART NUMBER	QTY.	
1	ET-Ø114_V500	Extension tube f. Ø114 - V500	1
2	GL114x3.2-5,5	tubular legs for Ø114,3	1
3	ISO - 4035 - M12 - N		6
4	ISO 4017 - M12 x 30-N		6

Rev.:	Int.:	Date:		Comment				
	X	Customer.:						
	4	Subjekt.:	Exter	nsion tube	f. Ø114 - V			
X		Date.: 1	19-10-2	2021	Production no.:	Scale.	1:10	Format:A3
~	VST C	Order no.:			Calculation:	Int.:	SP/MRF	Projektion:
Car	rie	Drawing. No.: E	ET-Ø11	4 V500		Note.:		Tolerance: DS/EN 1090-2
This drawing is our property and must not be copied, transfered or in any way used by a third party without our written permission								DS/ISO 2768-2-L

Carl C A/S Manufacturing Engineering Commerc Smedevej 2 DK-6900 Skjern Tel. +45 97351066 Fax +45 97351276 www.carl-c.com