## Installation:

1st nut should be spanned with 40 - 45Nm.

2nd nut should shall be brought at least to a snug-tight condition, with special care being given to avoid over-tightening. Nut-marking should be made acc. to figure after torque.


## Maintenance:


Visual inspection of bolt torque and any loose items is made 1 year after installation, and afterwards every 5th year.


Check if the marking from bolt torque is still straight.

Check if the corrosion protection system is satisfactory.

Any findings must be repaired as soon as possible.

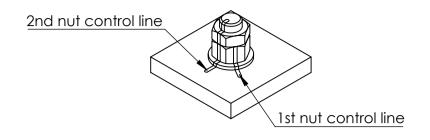

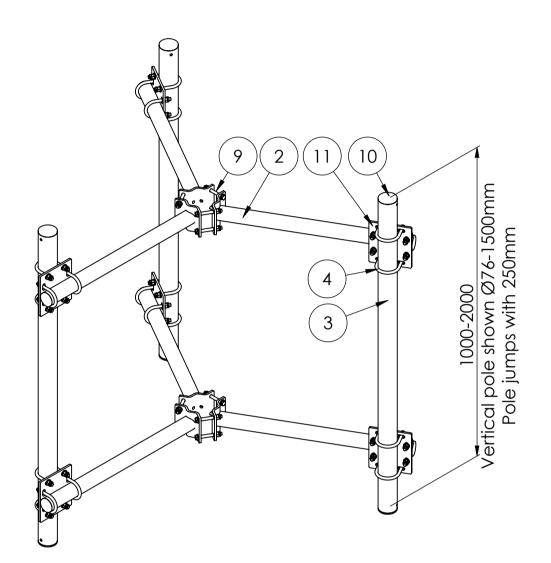

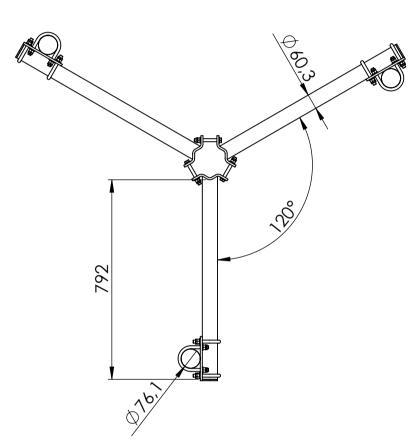

Basic wind Vb,0 = 27 m/s Terrain class TC = 1 Max height of installation = 70m

Max loads per 1 mount pole from equipment: 100kg, CxA=1.0m2

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
2	WBSTM_Ø76-121_H800	Horizontal pole with WB Ø76-121 - Vertical Ø76,1	6
3	Pole Ø76-1500	Vertical pole Ø76,1 - length: 1500	3
4	U-bolt M12 C-C = 90		12
5	U-bolt M12 C-C = 75		12
6	Washer ISO 7089 - 12		72
7	ISO - 4032 - M12 - W - N		60
8	ISO - 4035 - M12 - N		60
9	ISO 4017 - M12 x 100-C		12
10	GL 76x1.6-4	tubular legs for Ø76,1	6
11	MB-Ø60-76 300	Bracket vertical pole Ø60,3-76.1	6
12	GL 60x3-5	tubular legs for Ø60,3	6

Rev.: Int.: Date: Comment Customer .: Subjekt.: Antenna offset f. Ø76-121 with multi adjustable brackets Production no.: Scale.: 1:15 Date.: 24-06-2020 Format:A3 Calculation: Order no.: Projektion: Int.: SP/MRF Tolerance: DS/EN 1090-2 DS/ISO 2768-2-L Drawing. No.: WBSTM\_Ø76-121 H800 Note.: This drawing is our property and must not be copied, transfered or in any way used by a third party without our written permission Engineering Commerc Smedevej 2 DK-6900 Skjern Tel. +45 97351066 Fax +45 97351276 www.carl-c.com Carl C A/S Manufacturing